# **Brickslot**












## One meter unit

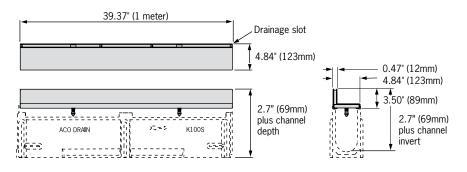

## Half meter unit



Access unit (must be used with catch basin and can also be used with channels)





# Brickslot trench drain system







Description	Part No.	Invert inches	Depth mm	Weight lbs.
Brickslot (galvanized steel) - 39.37" (1m)	98999	3.50	89	18.4
Brickslot (galvanized steel) - 19.69" (0.5m)	98988	3.50	89	9.2
Brickslot access unit (galv. steel) - 19.69" (0.5m)	96877	3.50	89	16.9
QuickLok/PowerLok grate removal tool	01318	-	-	0.3

#### Notes:

- 1. Add 2.7" (69mm) to channel invert for Brickslot invert
- 2. Brickslot can also be used with H80K and H100K
- 3. Only access cover can be removed once Brickslot has been installed

## **Specifications**

The surface drainage system shall be ACO Drain Brickslot, as manufactured by ACO Polymer Products, Inc. or equal approved.

#### Materials

The Brickslot top is manufactured from 11 gage galvanized steel.

The nominal clear opening for Brickslot slot is 7/16" (11mm) with overall width of 4.84" (123mm). Tapered slot prevents debris from being trapped. For use with K100S\* or H100K\* channels. See separate ACO Spec info sheet for channel details. Brickslot is secured by 'QuickLok' boltless locking system. Access units have frames that fit catch basin or channels with a separate cover unit that can be removed for maintenance.

### Installation

The trench drain system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

\*delete as appropriate

## **ACO Polymer Products, Inc.**

**East Sales Office** 

P.O. Box 245 Chardon, OH 44024 Tel: (440) 285-7000 Toll free: (800) 543-4764 Fax: (440) 285-7005

**West Sales Office** 

P.O. Box 12067 Casa Grande, AZ 85230 Tel: (520) 421-9988 Toll Free: (888) 490-9552 Fax: (520) 421-9899

**Electronic Contact:** info@acousa.com

www.acousa.com

